

Industrial quad line driver



SO-20



Features

- Operating voltage range: 10.8 V to 35 V
- Four independent line driver outputs with 100 mA operating current
- Outputs with push-pull architecture, three state control and true zero current between Vs and ground
- High speed operation: up to 300 kHz with 35 V swing
- Current limiting on each output effective in the full "ground to Vs" output voltage range
- Pre-setting delay for overcurrent diagnostic
- Output voltage clamp to Vs and to ground
- Input signals between - 7 V and + 35 V, with pre-setting threshold
- Overtemperature and undervoltage protections
- Diagnostic for overtemperature, undervoltage and overcurrent

Applications

- Programmable logic controllers
- High-density digital output modules
- Motor controllers
- PWM/PPO control

Description

L6374 is a fully protected quad channel line driver especially designed to be used in industrial control systems based on the 24 V signal levels (IEC 61131, 24 VDC).

Product status link

[L6374](#)

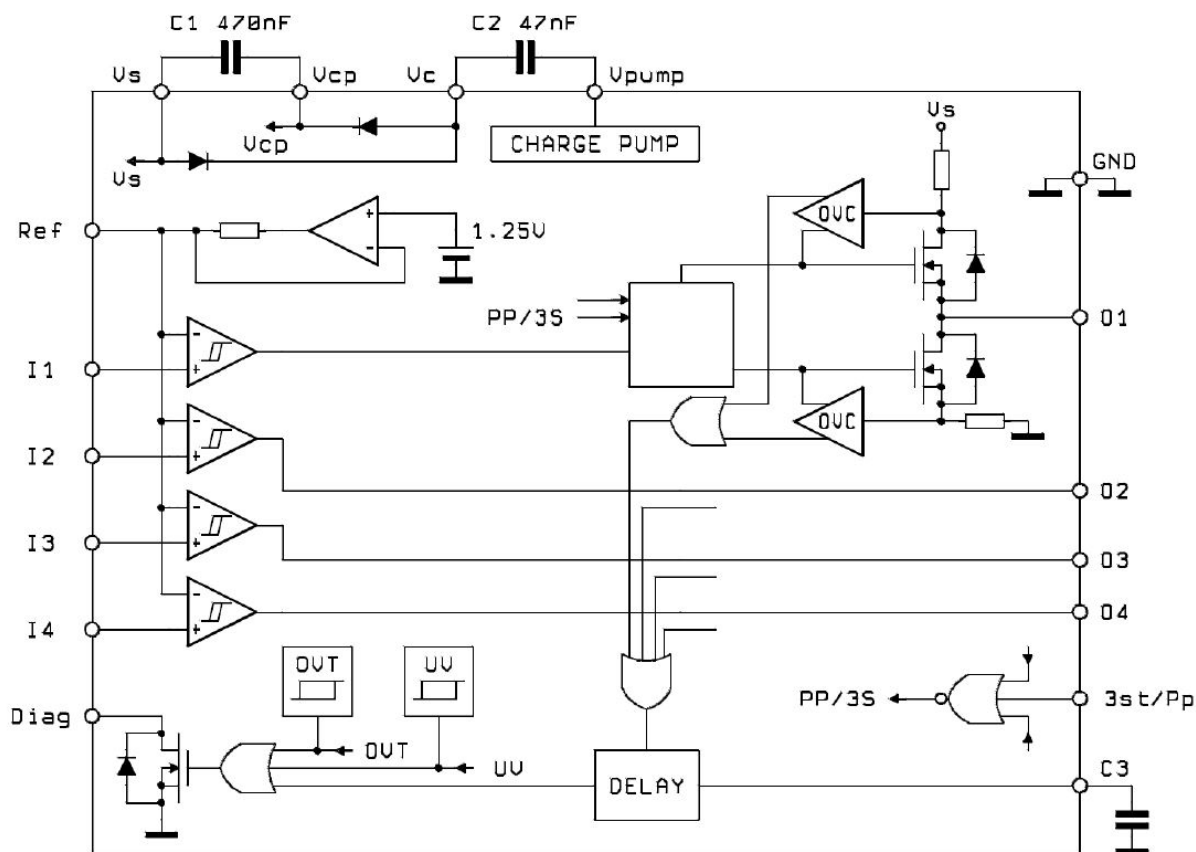
Order code	Package	Packaging
L6374FP	SO-20	Tube
L6374FP013TR		Tape and reel

Product label



1 Block diagram

Figure 1. Block diagram



2 Absolute maximum ratings

Table 1. Absolute maximum ratings

Symbol	Pin	Parameter	Value	Unit
V_S	1	Supply voltage ($t_W \leq 10$ ms)	50	V
		Supply voltage (DC)	40	V
V_{cp}	2	Internal supply voltage	$V_S + 10V$	V
V_{pmp}	19	Internal charge pump input voltage	0.3 to 10V	V
V_c	20	Internal charge pump output voltage	$V_S - 0.3V$ to $V_{cp} + 0.3V$	V
V_{ilog}	12	Logic input voltage (DC)	-0.3 to 7	V
I_{ilog}		Logic input forced current, per pin	± 1	mA
I_i	7, 8,	Channel input current (forced)	± 2	mA
V_i	9, 10	Channel input voltage	-7 to 35	V
I_{out}	3, 4, 17, 18	Output current (forced, apart from inductive load)	± 100	mA
		Output current (forced, apart from inductive load) same $t_W \leq 10$ ms	± 1	A
V_{out}		Output voltage (forced, not resulting from an inductive kick)	-0.3 to $V_S + 0.3$	V
I_{set}	11	Setting pin forced current	± 1	mA
V_{set}		Setting pin forced voltage	-0.3 to 5	V
V_{diag}	14	External voltage	-0.3 to 35	V
I_{diag}		Externally forced current	-10 to 10	mA
V_{C3}	13	Voltage on the delay capacitor, externally forced	-0.3 to 4.5	V
T_{op}		Ambient temperature, operating range	-25 to 85	°C
T_J		Junction temperature, operating range (see overtemperature protection)	-25 to 125	°C
T_{stg}		Storage temperature	-55 to 150	°C

3 Pins configuration

Figure 2. Pins connection (top view)

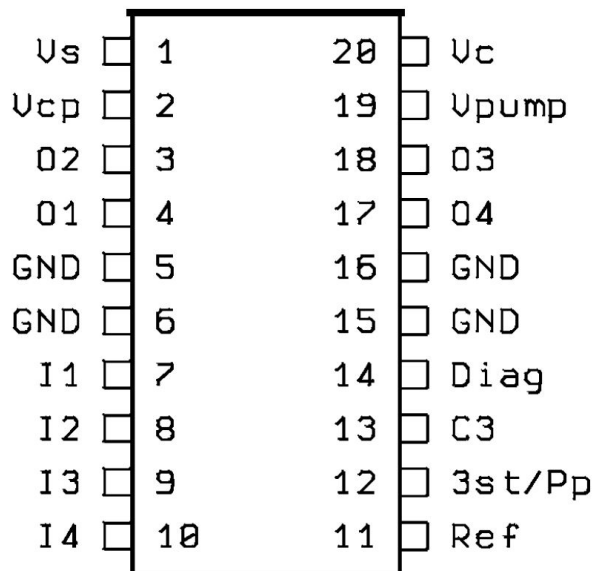


Table 2. Pin function

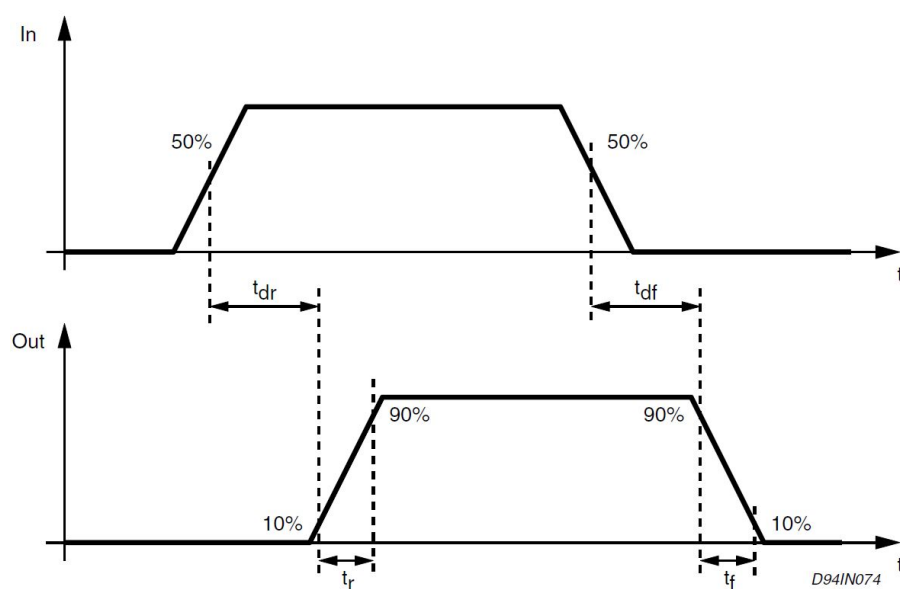
Pin	Name	Type	Description
1	Vs	Supply	Supply voltage
2	Vcp	Supply	Internally generated supply
3	O2	Power output	Channel 2 power output
4	O1	Power output	Channel 1 power output
5	GND	Power ground	Ground
6	GND	Power ground	Ground
7	I1	Channel input	Channel 1 input
8	I2	Channel input	Channel 2 input
9	I3	Channel input	Channel 3 input
10	I4	Channel input	Channel 4 input
11	REF	Logic input	see Section 10
12	3st/Pp	Input	see Section 11
13	C3	Input/output	see Section 9
14	Diag	Output open drain	Diagnostic output pin
15	GND	Power ground	Ground
16	GND	Power ground	Ground
17	O4	Power output	Channel 4 power output
18	O3	Power output	Channel 3 power output
19	Vpump	Analog input	Input of internal charge pump
20	Vc	Analog output	Output of internal charge pump

4 Electrical characteristics

Table 3. Electrical characteristics

Symbol	Pin	Parameter	Test condition	Min	Typ	Max	Unit
DC operation (V _S = 24 V; T _J = -25 to 125°C; unless otherwise specified)							
V _S	1	Supply voltage		10.8		35	V
V _{sh}		UV upper threshold		9		10.8	V
H _{ys1}		UV hysteresis		250	450	650	mV
I _{qsc}		Quiescent current	Outputs open		3	5	mA
V _{REF}	11	Input comparators reference voltage	Reference pin floating	1.05	1.25	1.35	V
I _{ref}		Sink/source current on reference pin	V _{REF} = 0 V	-30	-20	-10	μA
			V _{REF} = 5 V	10	20	30	μA
V _{th}	7, 8,9, 10	Comparator threshold with external bias	V _S = 9 to 12 V	-0.2		2.0	V
			V _S = 12 to 35 V	-0.2		5.0	V
V _{il}		Input low level	V _{REF} externally biased	-7		V _{REF} -0.2	V
			Pin V _{REF} floating	-7		0.8	V
V _{ih}		Input high level	V _{REF} externally biased	V _{REF} +0.2		35	V
			Pin V _{REF} floating	2		35	V
V _i		Input voltage (operative range)		-7		35	V
I _{bias}		Input bias current	0 < V _i < V _S	-1		1	μA
			V _i = -7 V	-1	-0.5	-0.1	mA
H _{ys2}		Input comparators hysteresis	See analog inputs sections	100	200	350	mV
T _h		OVT upper threshold			170		°C
H _T		OVT hysteresis			20		°C
I _{sc}	3, 4,17,18	Current limit	V _i = -7 to V _S ; V _{out} = 0 to V _S ;	110	200	300	mA
V _{on}		Internal voltage drop @ rated current	I _{out} = ± 100 mA; sourced @ high output, sunk @low output T _J = 125 °C		400	600	mV
			I _{out} = ± 100 mA; sourced @ high output, sunk @low output T _J = 25 °C		250	400	mV
I _{lkg}		Output 3-state leakage current	V _{out} = 0 to V _S	-25		25	μA
V _{in}	12	Push-pull mode request		-0.2		0.8	V
		3-state mode request		2		5.5	V
I _{in}		Input current	V _i = 0 V		10	25	μA
I _{dlkg}	14	Diagnostic output leakage	Diagnostic OFF; V _{diag} = 24 V			5	μA
V _{diag}		Diagnostic output voltage drop	I _{diag} = 5 mA		200	500	mV

Symbol	Pin	Parameter	Test condition	Min	Typ	Max	Unit
AC operation ($V_S = 10.8$ to 35 V; $T_J = -25$ to 125 °C; $I_{out} = 100$ mA; unless otherwise specified; see switching waveforms diagrams)							
t_{dr}	7 to 4 8 to 3	Delay time on rising edge	R_I to ground		1000	1500	ns
			R_I to V_S		500	1000	ns
t_{df}	9 to 18 10 to 17	Delay time on falling edge	R_I to ground		500	1000	ns
			R_I to V_S		1000	1500	ns
t_r	3, 4, 17, 18	Rise time	R_I to ground		120	250	ns
			R_I to V_S		120	250	ns
t_f	3, 4, 17, 18	Fall time	R_I to ground		150	300	ns
			R_I to V_S		150	300	ns

Figure 3. Switching waveforms


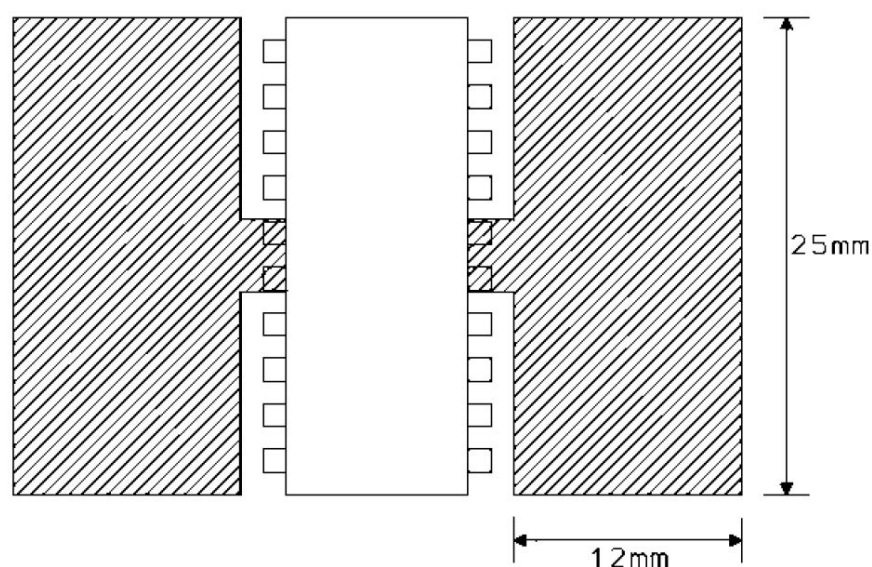
5 Thermal characteristics

Table 4. Thermal data

Symbol	Parameter	Value	Unit
R_{thJP}	Thermal resistance, junction, see R_{thJP}	17	°C/W
R_{thJA1}	Thermal resistance, junction to ambient (see R_{thJA1})	65	°C/W
R_{thJA2}	Thermal resistance, junction to ambient (see R_{thJA2})	80	°C/W

5.1 R_{thJP}

The reference point is the knee on the four central pins, where the pins are upwardly bent and the soldering joint with the PCB footprint can be made.

Figure 4. Printed heatsink


5.2 R_{thJA1}

If a dissipating surface, thick at least 35 mm, and with a surface similar or bigger than the one shown in Figure 4, is created making use of the printed circuit. Such heatsinking surface is considered on the bottom side of an horizontal PCB (worst case).

5.3 R_{thJA2}

If the power dissipating pins (the four central ones), as well as the others, have a minimum thermal connection with the external world (very thin strips only) so that the dissipation takes place through still air and through the PCB itself.

It is the same situation of point above, without any heatsinking surface created on purpose on the board.

6 Overtemperature protection (OVT)

If the chip temperature exceeds T_h (measured in a central position in the chip) the chip deactivates itself.

The following actions are taken:

- all the output stages are forced in the "three state" condition, i.e. are disconnected from the output pins; only the clamping diodes at the outputs remain active;
- the signal Diag is activated (active low).

Normal operation is resumed as soon as (typically after some seconds) the chip temperature monitored goes back below $T_h - H_T$.

The different upper and lower thresholds with hysteretic behavior, assure that no intermittent conditions can be generated.

7 Undervoltage protection (UV)

The supply voltage is expected to range from 11 V to 35 V, even if its reference value is considered to be 24 V. In this range the L6374 operates correctly. Below 10.8 V the overall system has to be considered not reliable. Consequently the supply voltage is monitored continuously and a signal, called UV, is internally generated and used.

The signal is "on" as long as the supply voltage does not reach the upper internal threshold of the V_s comparator (called V_{sh}). The UV signal disappears above V_{sh} .

Once the UV signal has been removed, the supply voltage must decrease below the lower threshold (i.e. below $V_{sh}-H_{ys1}$) before it is turned on again.

The hysteresis H_{ys1} is provided to prevent intermittent operation of the device at low supply voltages that may have a superimposed ripple around the average value.

The UV signal inhibits the outputs, putting them in three-state, but has no effect on the creation of the reference voltages for the internal comparators, nor on the continuous operation of the charge-pump circuits.

8 Diagnostic logic

The situations that are monitored and signalled with the Diag output pin are:

- current limit (OVC) in action;
there are 8 individual current limiting circuits, two per each output, i.e. one per every output transistor; they limit the current that can be either sourced or sunk from each output, to a typical value of 200mA, equal for all of them;
- undervoltage protection (UV);
- overtemperature protection (OVP);
the diagnostic signal is transmitted via an open drain output (for ease of wired-or connection of several such signals) and a low level represents the presence of at least one of the monitored conditions, mentioned above.

9 Programmable delay

The current limiting circuits can be requested to perform even in absence of a real fault condition, for a short period, if the load is of capacitive nature or if it is a filament lamp (that exhibits a very low resistance during the initial heating phase). To avoid the forwarding of misleading, short diagnostic pulses in coincidence with the intervention of the current limiting circuits when operating on capacitive loads, a delay of about 5 μs is inserted on the signal path, between the "OR" of the current limit signals and its use as external diagnostic. It takes about 1 μs to charge (or discharge) by 24 V a capacitor of 5 nF with a current of 120 mA . To implement longer delays (from the intervention of one of the current limiting circuits to the activation of the diagnostic) an external capacitor can be connected between pin C3 and ground (pin C3 is otherwise left open).

The delay shall then be determined by the ratio of about 10 pF/ μs , using the value of the capacitance connected to the pin.

10 Analog inputs (I1,I2,I3,I4)

The input stage of each channel is a high impedance comparator with built-in hysteresis (200 mV) for high noise immunity. Each comparator has one input connected to all the others and tied to a common pin Ref (Pin 11). If this pin is left floating, then an internal precise band gap voltage reference (1.25 V) is applied, otherwise these inputs can be externally programmed by connecting an external voltage source (from 0 to 5 V) and the current on this pin is internally limited to ± 20 mA. The other input pin of each comparator can swing from -7 to 35 V.

For this reason it has been implemented the structure shown in Figure 5 and the device can also be used as line receiver.

When the input voltage is negative, the current is internally limited by a 15 k Ω resistor as shown in Figure 5. High and low input thresholds can be obtained by adding and subtracting half of the hysteresis to the voltage of pin Ref (see Figure 6).

Figure 5. Equivalent input circuit

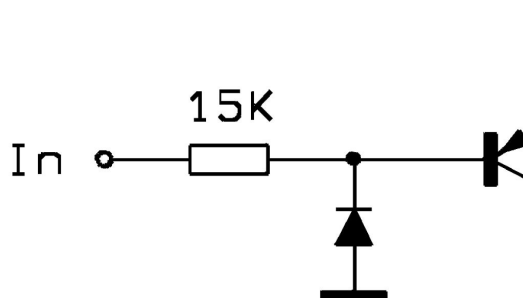
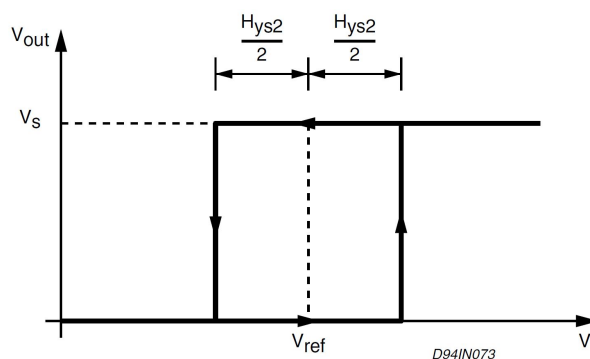


Figure 6. Input comparator threshold



11 State / push-pull input

The input 3st/Pp is instead intended for a digital incoming signal. It has an internal threshold set at 1.26 V; an internal bias circuit (10 mA typical) simulates a high level (three-state) if the pin is disconnected.

12 The switching of the output stage

The cross conduction of the two transistors of an output stage of the L6374 would be significantly noisy, because the transistors here can carry peak currents in excess of 100 mA, and even more in the few nanoseconds before the current limiting circuits are really effective.

Consequently the device has been designed to avoid such cross conduction. At every switching transition, first of all the transistor in conduction is turned OFF. Then, after a safe interval of around 200 ns, the other transistor is turned on.

When analyzing the switching cycle, and the associated switching times, it is useful to identify some subsequent phases:

- delay from the input pin to the output reaction;
- OFF transition in the output stage;
- dead time;
- on transition in the output stage.

Figure 7. $V_S = 35\text{ V}$, $350\ \Omega$ connected to $V_S/2$

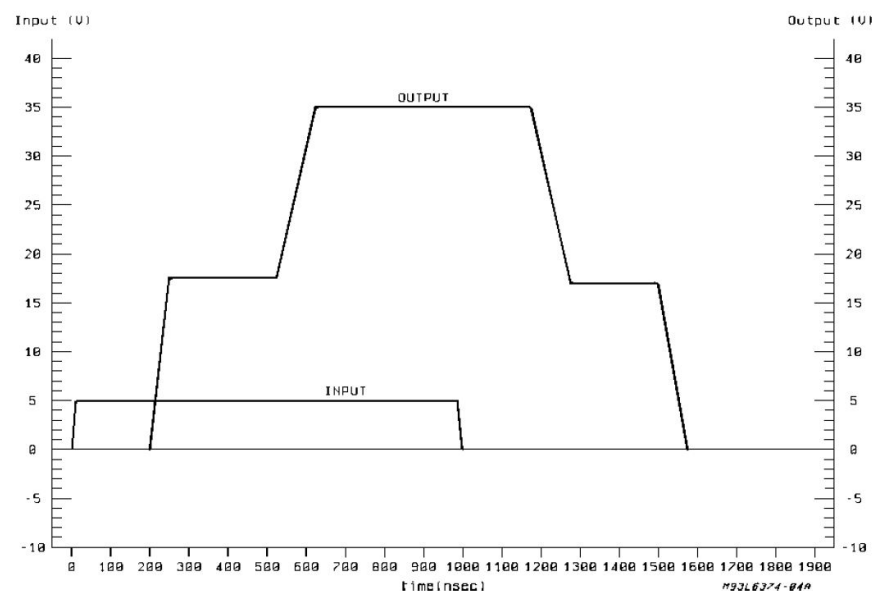
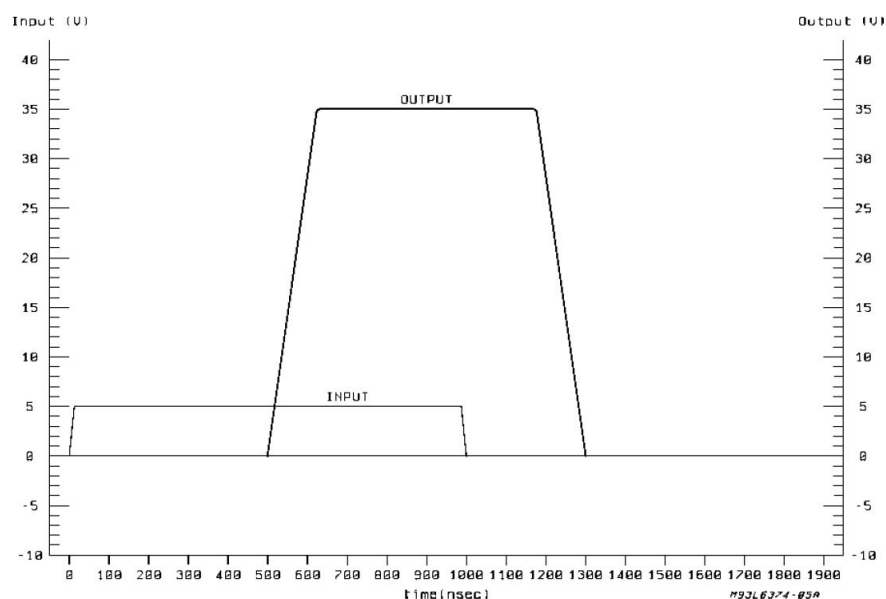
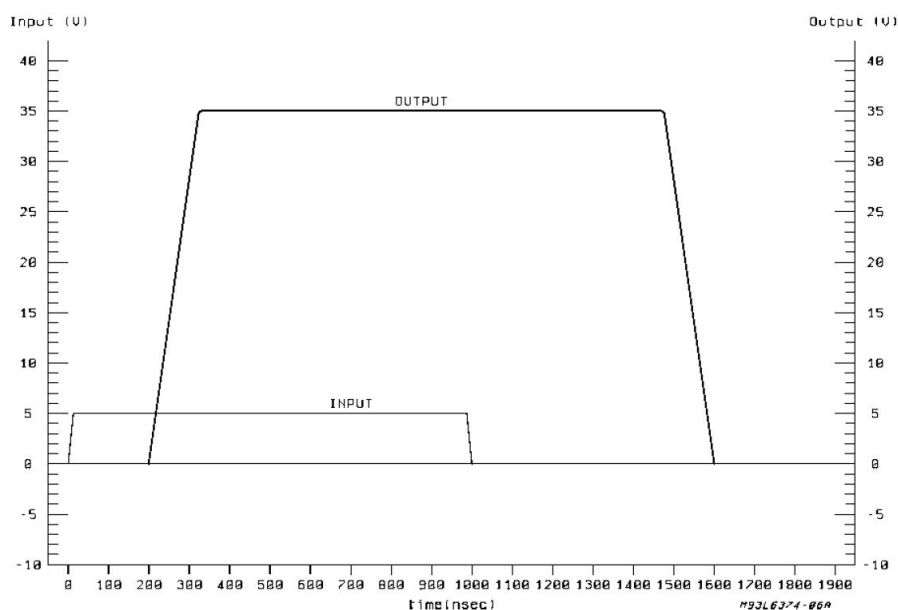


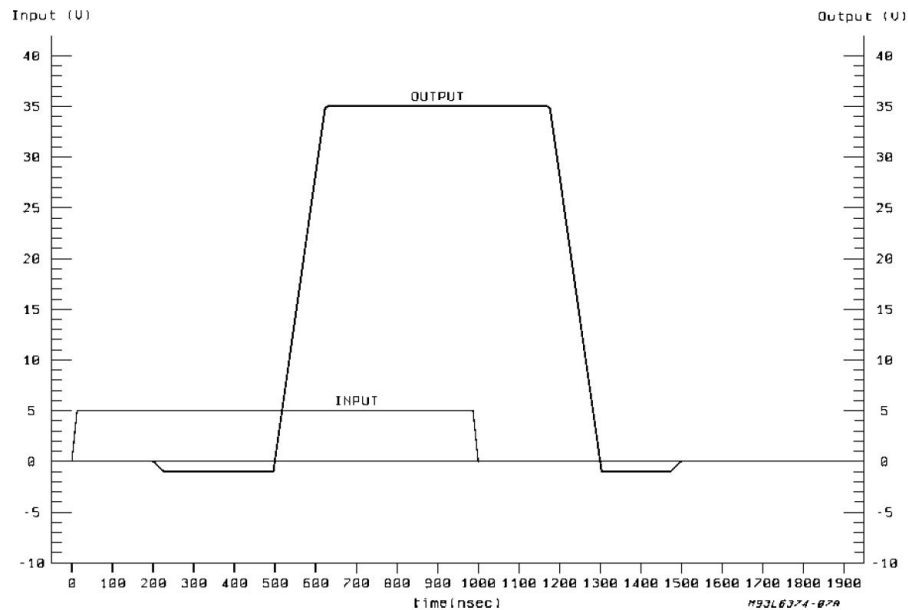
Figure 7 helps understand such sequence. In fact, with a purely resistive load connected to $V_S/2$ no parasitic elements interfere significantly. The interpretation of the waveform can be significantly less easy if the load has not the perfect symmetry of that case, as showed below.

For instance, it is enough to connect the resistive load to ground, or to V_S – as Figure 8 and Figure 9 – show to hide some of the switching phases described.

Figure 8. $V_S = 35\text{ V}$, $350\ \Omega$ connected to ground

Figure 9. $V_S = 35\text{ V}$, $350\ \Omega$ connected to V_S


If the load is connected to ground, the waveform stays stuck to ground as long as the output stage is in high impedance; viceversa, when the load is connected to V_S the waveform will linger close to the supply voltage as long as possible.

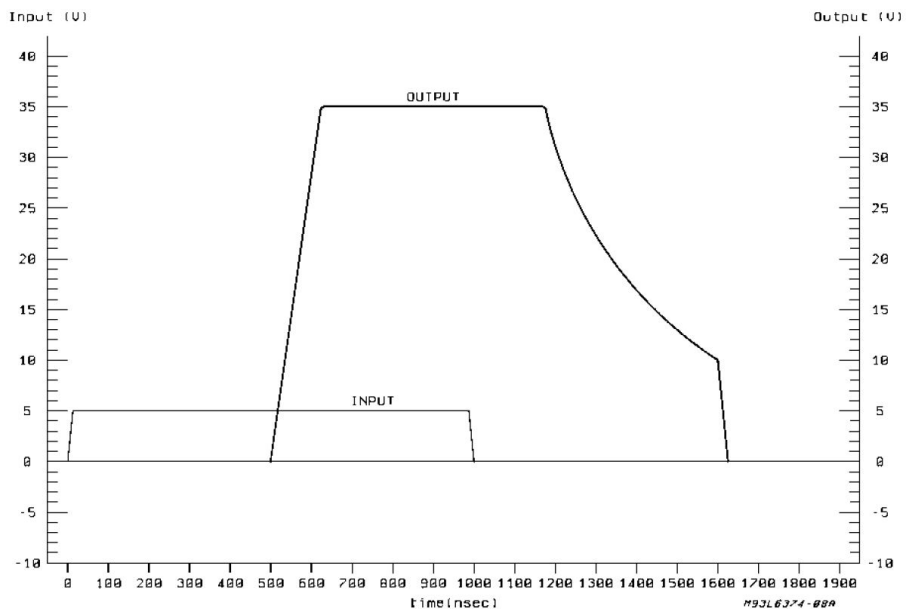
If an output load made of an inductor and a resistor in series is used, the inductive kick at the beginning of every output transition generates the equivalent effect of an "anticipated" switching when the inductor can discharge; while the switching looks "delayed" if the output transition tends to initiate a charging phase (see Figure 10). With a load almost free from parasitic elements, the waveforms resemble the ones of the purely resistive cases.

Figure 10. $V_S = 35\text{ V}$, $350\ \Omega$ and 1 mH connected to ground


With a real, more composite load, the effect of the inductive kick in comparison to the resistive load, would be more apparent.

With a capacitor and a resistor in parallel as a load, another type of waveform can be seen (reported in [Figure 11](#)).

As long as the output stage stays in the transient high impedance state, the output voltage will follow the classic exponential law of an RC relaxation.

Figure 11. $V_S = 35\text{ V}$, $350\ \Omega \parallel 1\text{ nF}$ connected to ground.


As soon as the other transistor is switched on and takes charge, the waveform is quickly forcibly brought to its steady state value.

From the above it is possible to see how the switching times, inherently very fast, of the output stages, may be difficult to identify in a waveform if the output load is not accurately taken into consideration.

13 Application note

It is recommended not to leave the Ref pin (pin 11) floating: if not used with an external voltage reference, it is better to connect an external capacitor (of at least 10 nF) between this pin and ground.

This capacitor filters the voltage reference against voltage spikes that can be generated by the commutation of the output stages.

This is very common using capacitive loads: in fact, the initial transient of such loads behaves like a short circuit, so the current flowing through the outputs presents very high spikes.

Moreover, if the device is used as a line receiver. (i.e. the input signals can go below ground) it is required not to leave the Ref pin (pin 11) floating: in this case, the pin can be connected to ground or to a fixed external voltage reference.

14 Package information

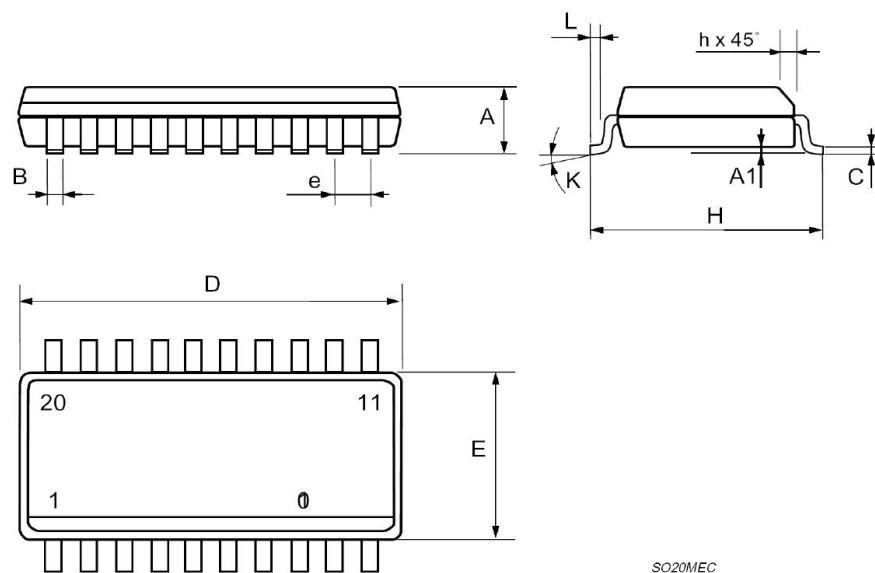
In order to meet environmental requirements, ST offers these devices in different grades of **ECOPACK** packages, depending on their level of environmental compliance. ECOPACK specifications, grade definitions and product status are available at: www.st.com. ECOPACK is an ST trademark.

14.1 SO-20 mechanical data

Table 5. SO-20 mechanical data

Dim.	mm			inch		
	Min	Typ	Max	Min	Typ	Max
A	2.35		2.65	0.093		0.104
A1	0.1		0.3	0.004		0.012
B	0.33		0.51	0.013		0.020
C	0.23		0.32	0.009		0.013
D	12.6		13	0.496		0.512
E	7.4		7.6	0.291		0.299
e		1.27			0.050	
H	10		10.65	0.394		0.419
h	0.25		0.75	0.010		0.030
L	0.4		1.27	0.016		0.050
K	0° (min.) 8° (max.)					

Figure 12. Package dimensions



Revision history

Table 6. Document revision history

Date	Version	Changes
01-Aug-2003	1	Initial release.
02-Jun-2004	2	Technical migration from ST-PRESS to EDOCS.
03-Mar-2008	3	Removed obsolete package DIP-20
04-Jul-2024	4	Updated document format; changed commercial product code in front page; added Table 2. Pin function ; corrected some typo in Section 4 ; changed figures position; some minor changes.

Contents

1	Block diagram	2
2	Absolute maximum ratings	3
3	Pins configuration	4
4	Electrical characteristics.....	5
5	Thermal characteristics	7
5.1	R_{thJP}	7
5.2	R_{thJA1}	7
5.3	R_{thJA2}	7
6	Overtemperature protection (OVT)	8
7	Undervoltage protection (UV)	9
8	Diagnostic logic	10
9	Programmable delay.....	11
10	Analog inputs (I1,I2,I3,I4).....	12
11	State / push-pull input	13
12	The switching of the output stage.....	14
13	Application note	17
14	Package information.....	18
14.1	SO-20 mechanical data	18
	Revision history	19
	List of tables	21
	List of figures.....	22

List of tables

Table 1.	Absolute maximum ratings	3
Table 2.	Pin function	4
Table 3.	Electrical characteristics	5
Table 4.	Thermal data	7
Table 5.	SO-20 mechanical data	18
Table 6.	Document revision history	19

List of figures

Figure 1.	Block diagram	2
Figure 2.	Pins connection (top view)	4
Figure 3.	Switching waveforms.	6
Figure 4.	Printed heatsink	7
Figure 5.	Equivalent input circuit.	12
Figure 6.	Input comparator threshold.	12
Figure 7.	$V_S = 35\text{ V}$, $350\ \Omega$ connected to $V_S/2$	14
Figure 8.	$V_S = 35\text{ V}$, $350\ \Omega$ connected to ground.	15
Figure 9.	$V_S = 35\text{ V}$, $350\ \Omega$ connected to V_S	15
Figure 10.	$V_S = 35\text{ V}$, $350\ \Omega$ and 1 mH connected to ground	16
Figure 11.	$V_S = 35\text{ V}$, $350\ \Omega \parallel 1\text{ nF}$ connected to ground.	16
Figure 12.	Package dimensions	18

IMPORTANT NOTICE – READ CAREFULLY

STMicroelectronics NV and its subsidiaries ("ST") reserve the right to make changes, corrections, enhancements, modifications, and improvements to ST products and/or to this document at any time without notice. Purchasers should obtain the latest relevant information on ST products before placing orders. ST products are sold pursuant to ST's terms and conditions of sale in place at the time of order acknowledgment.

Purchasers are solely responsible for the choice, selection, and use of ST products and ST assumes no liability for application assistance or the design of purchasers' products.

No license, express or implied, to any intellectual property right is granted by ST herein.

Resale of ST products with provisions different from the information set forth herein shall void any warranty granted by ST for such product.

ST and the ST logo are trademarks of ST. For additional information about ST trademarks, refer to www.st.com/trademarks. All other product or service names are the property of their respective owners.

Information in this document supersedes and replaces information previously supplied in any prior versions of this document.

© 2024 STMicroelectronics – All rights reserved